(12) **UK Patent** (19) **GB** (11) **2 351 810** (13) **B**

(54) Title of Invention

Flow meter for multi-phase mixtures

(51) INT CL⁷; G01F 1/74 // E21B 47/10, G01F 1/88, G01N 9/24 23/12

(72) Inventor(s)
Kenneth Edward Stephenson
John William James Ferguson
John Barry Fitzgerald
Anthony Robert Holmes Goodwin
Gerald Henry Meeten
Sarah Elizabeth Pelham

(73) Proprietor(s)
Schlumberger Limited

(Incorporated in the
Netherlands Antilles)

5 Julianaplein
Curacao
Netherlands Antilles

(74) Agent and/or
Address for Service
Schlumberger Cambridge
Research Limited
High Cross
Madingley Road
Cambridge
CB3 0EL
United Kingdom
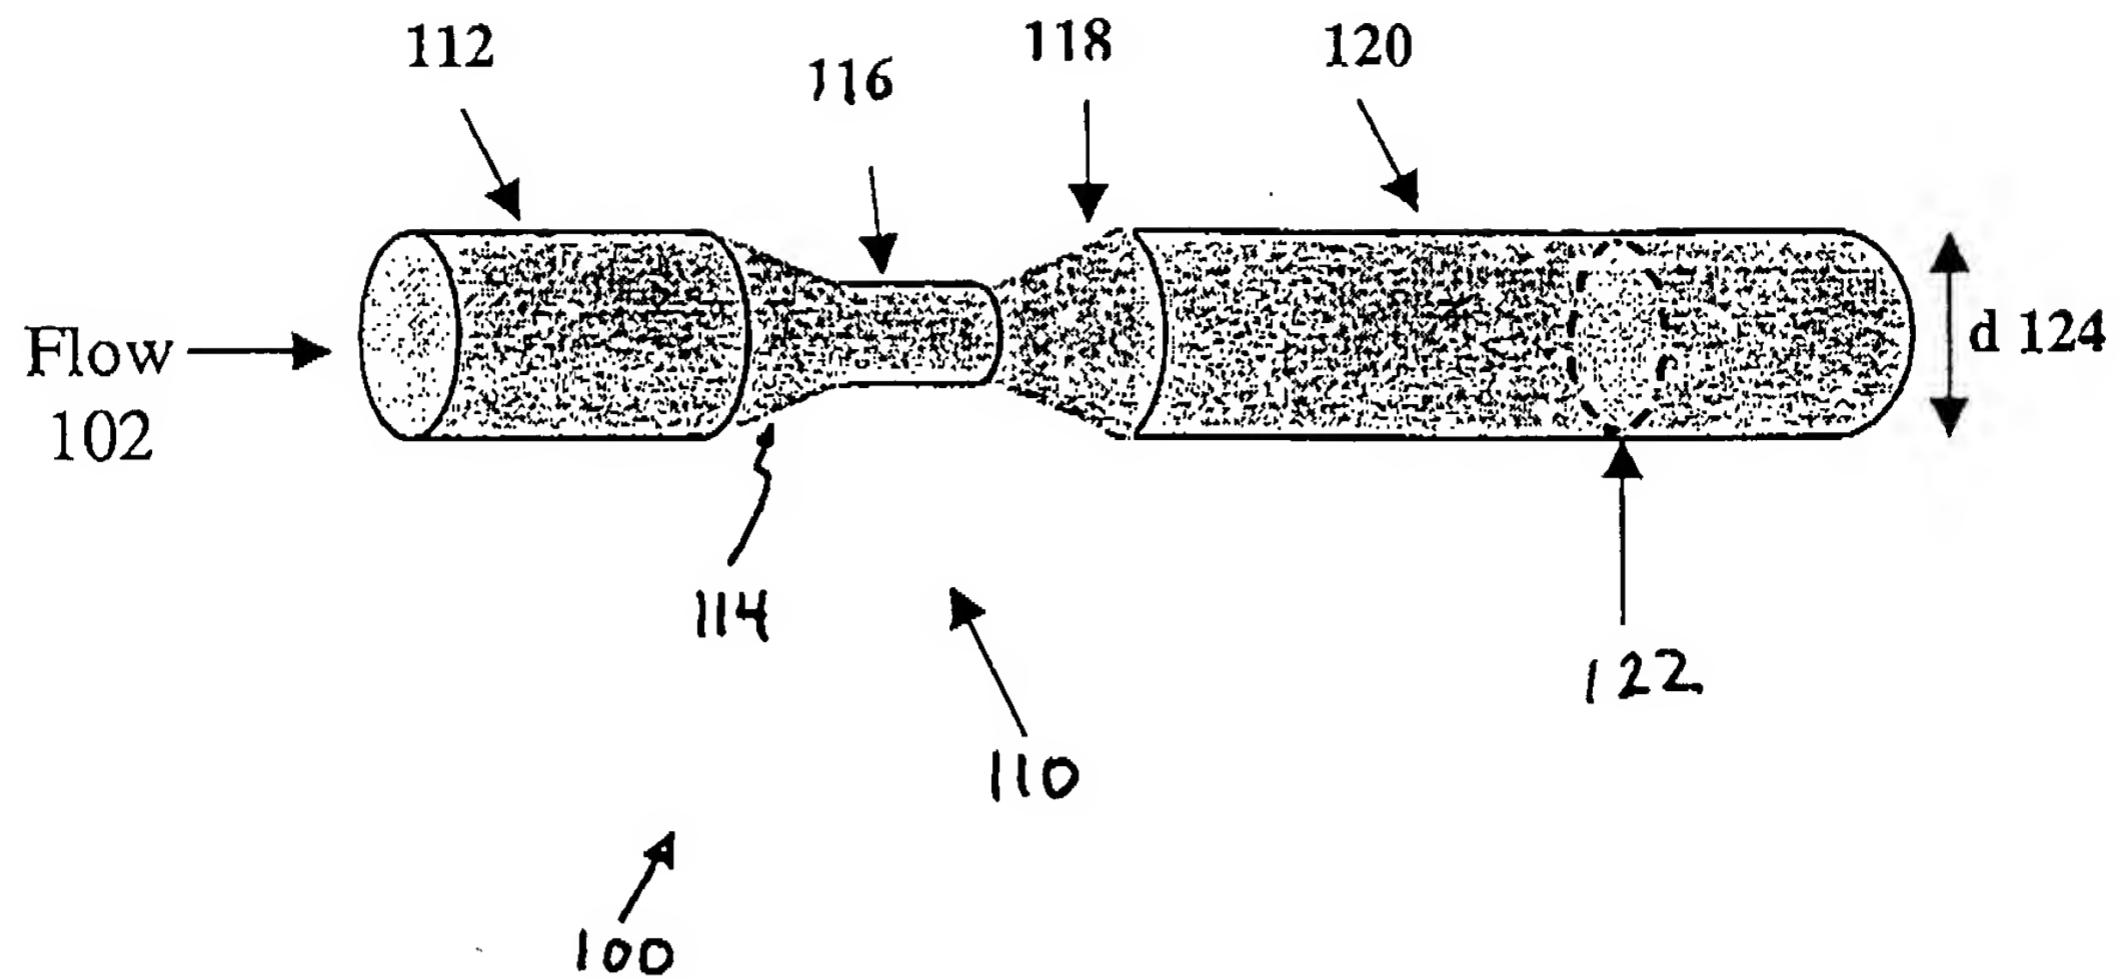
Fig. 1

Fig. 2
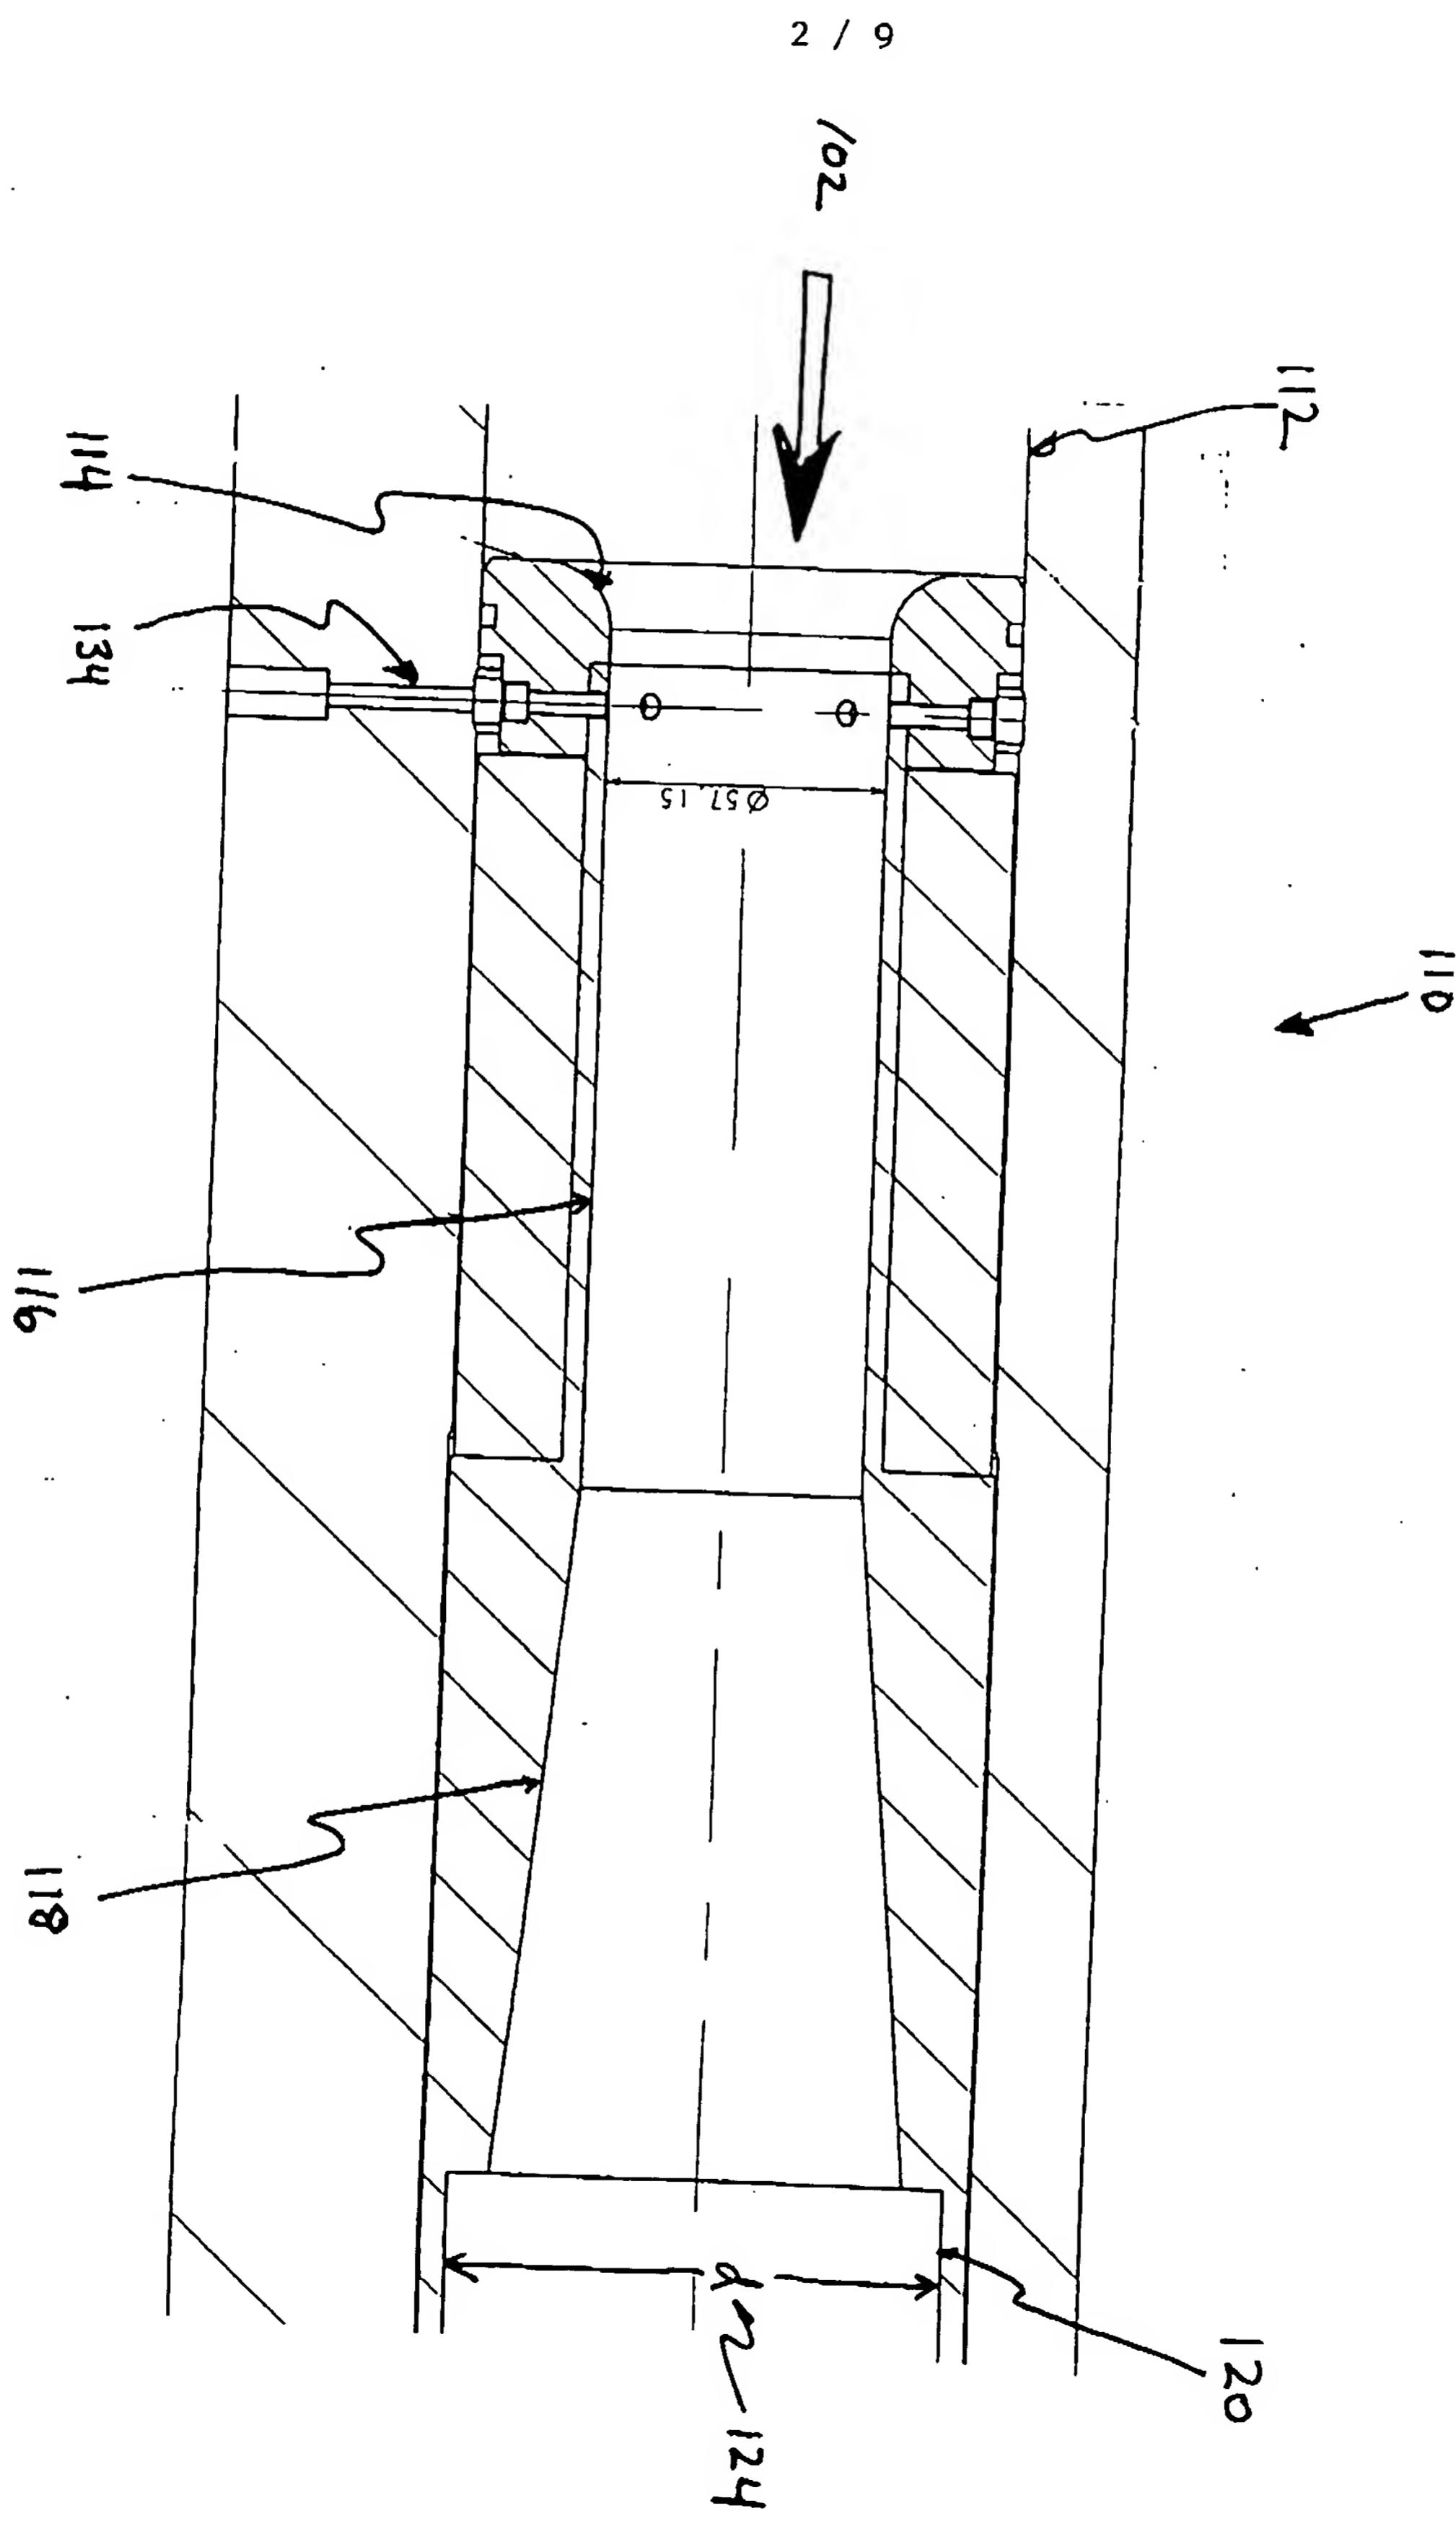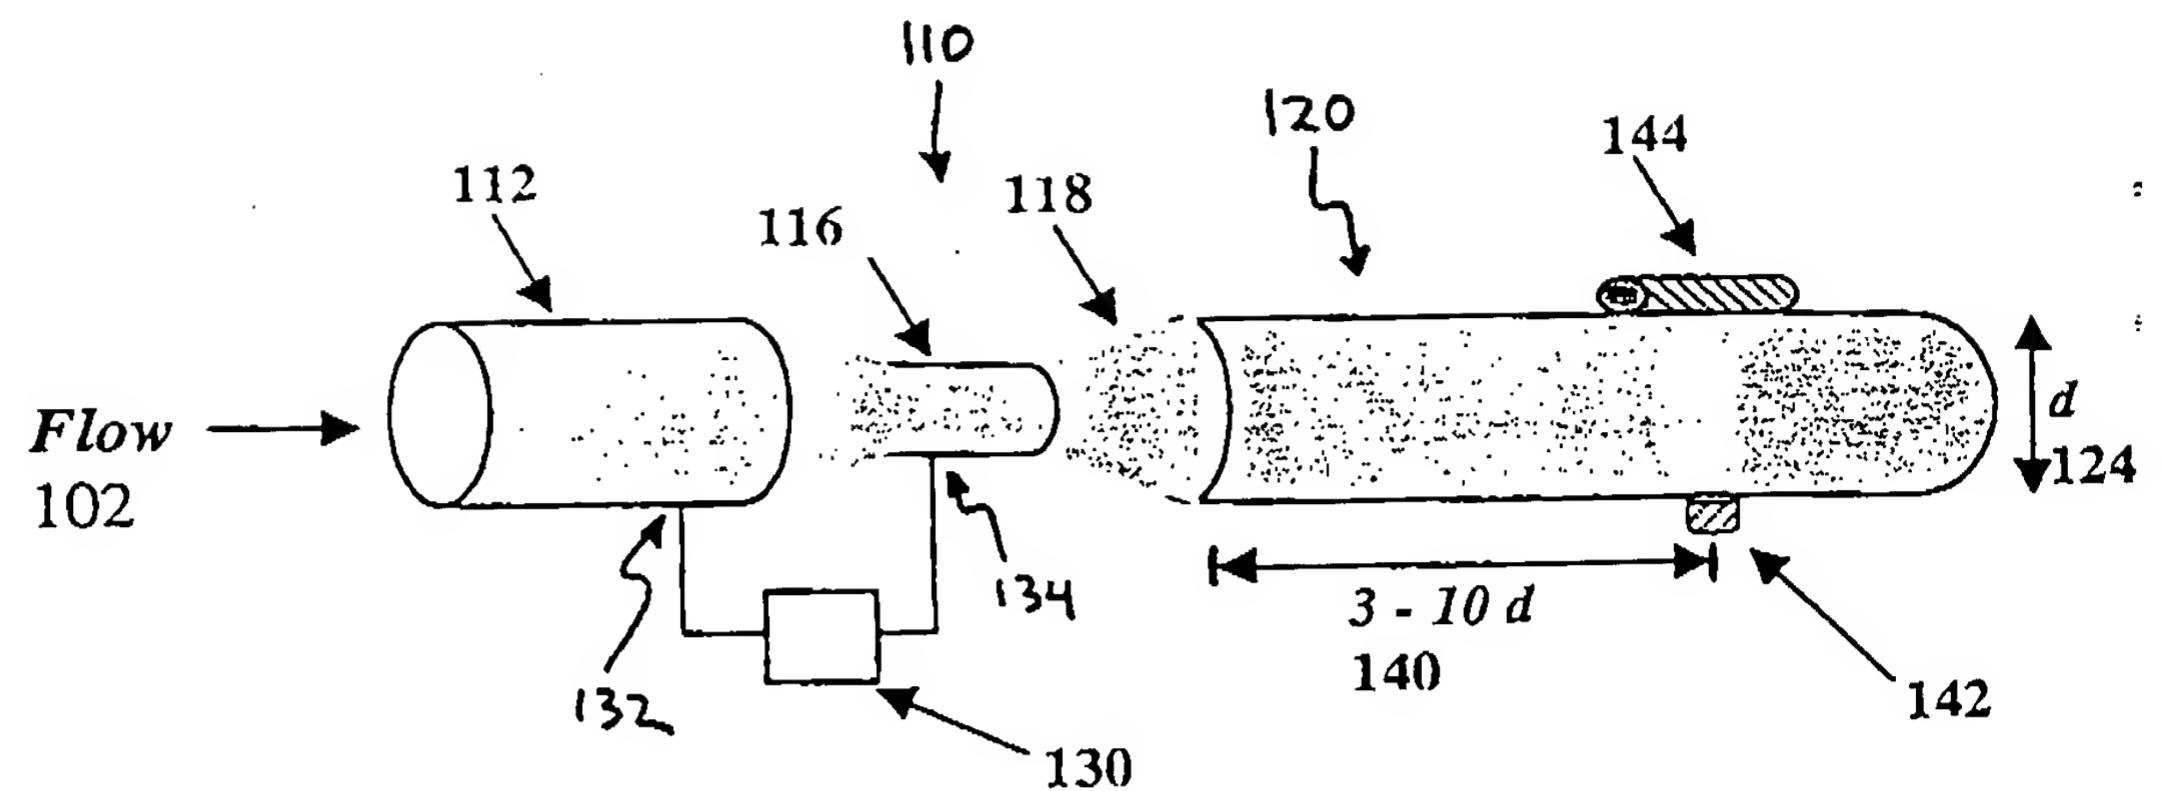
Fig. 3
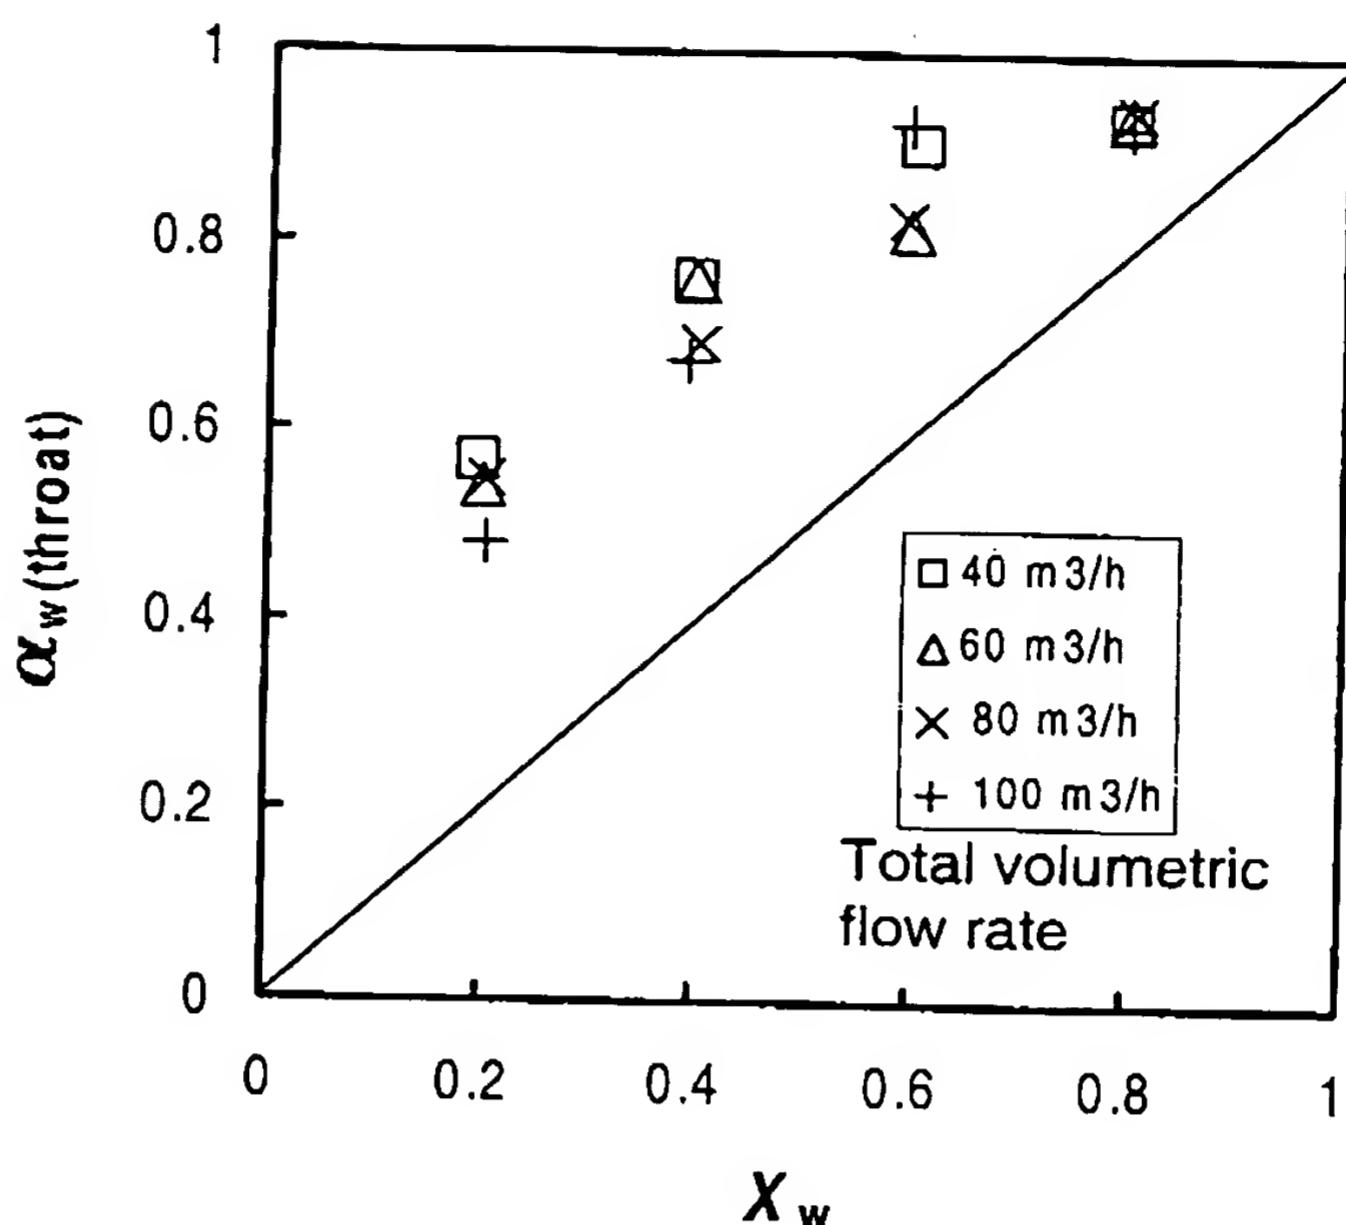
Fig. 4
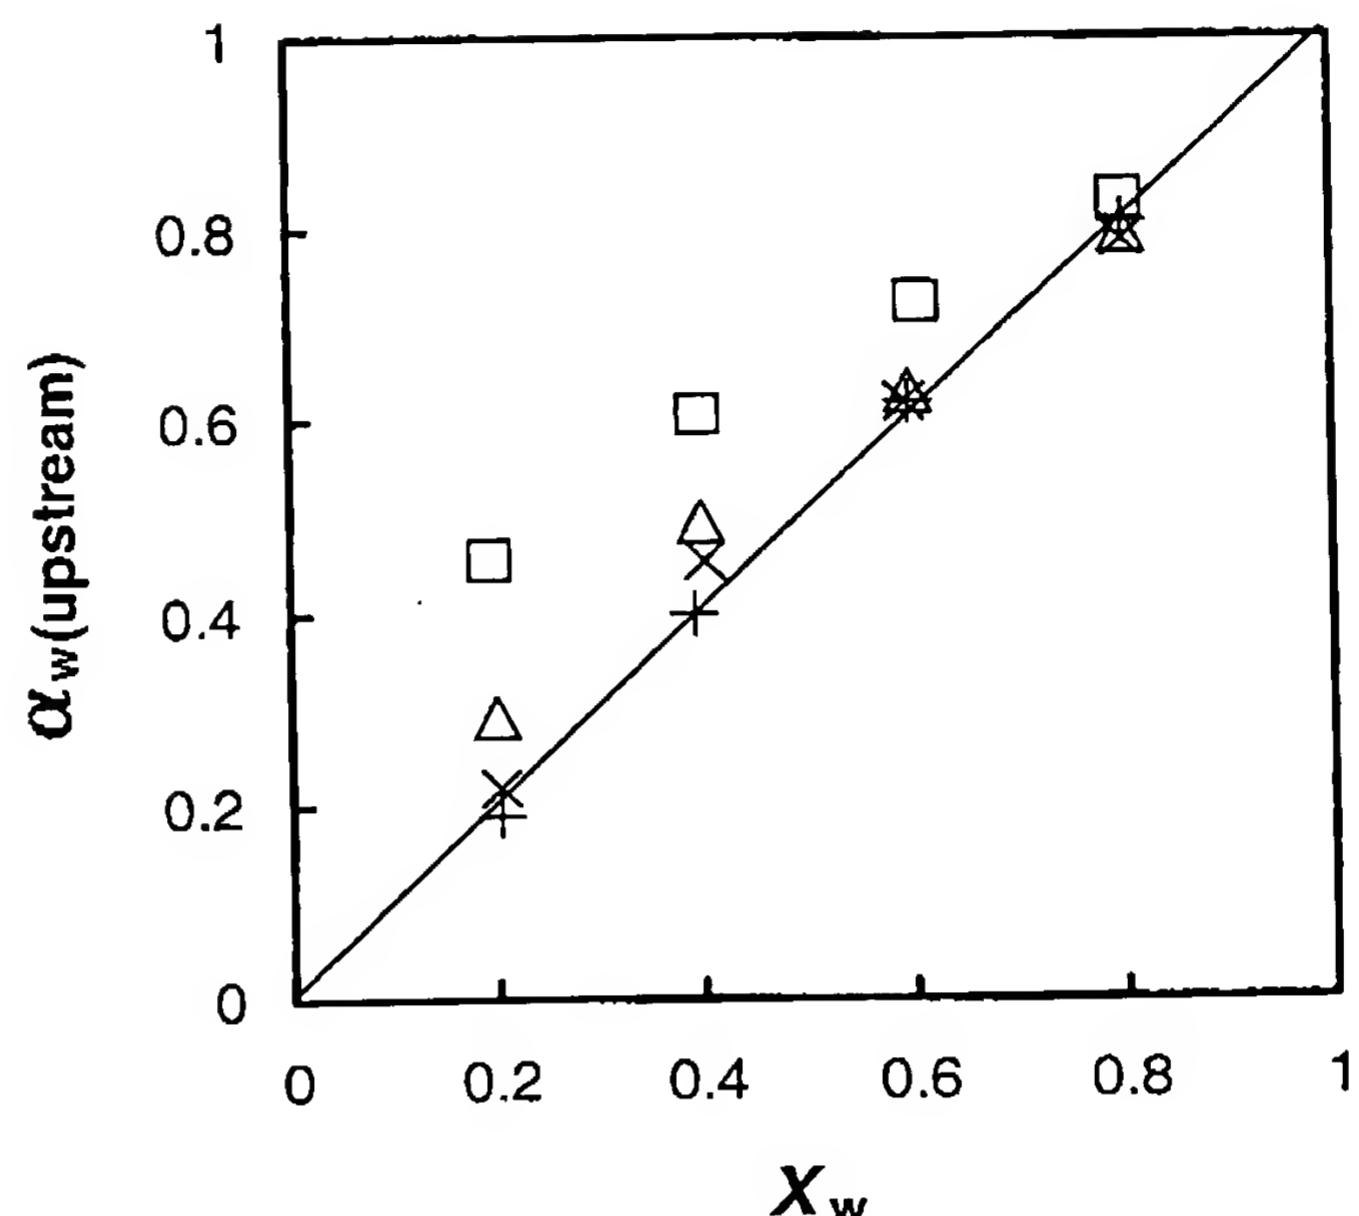
Fig. 5
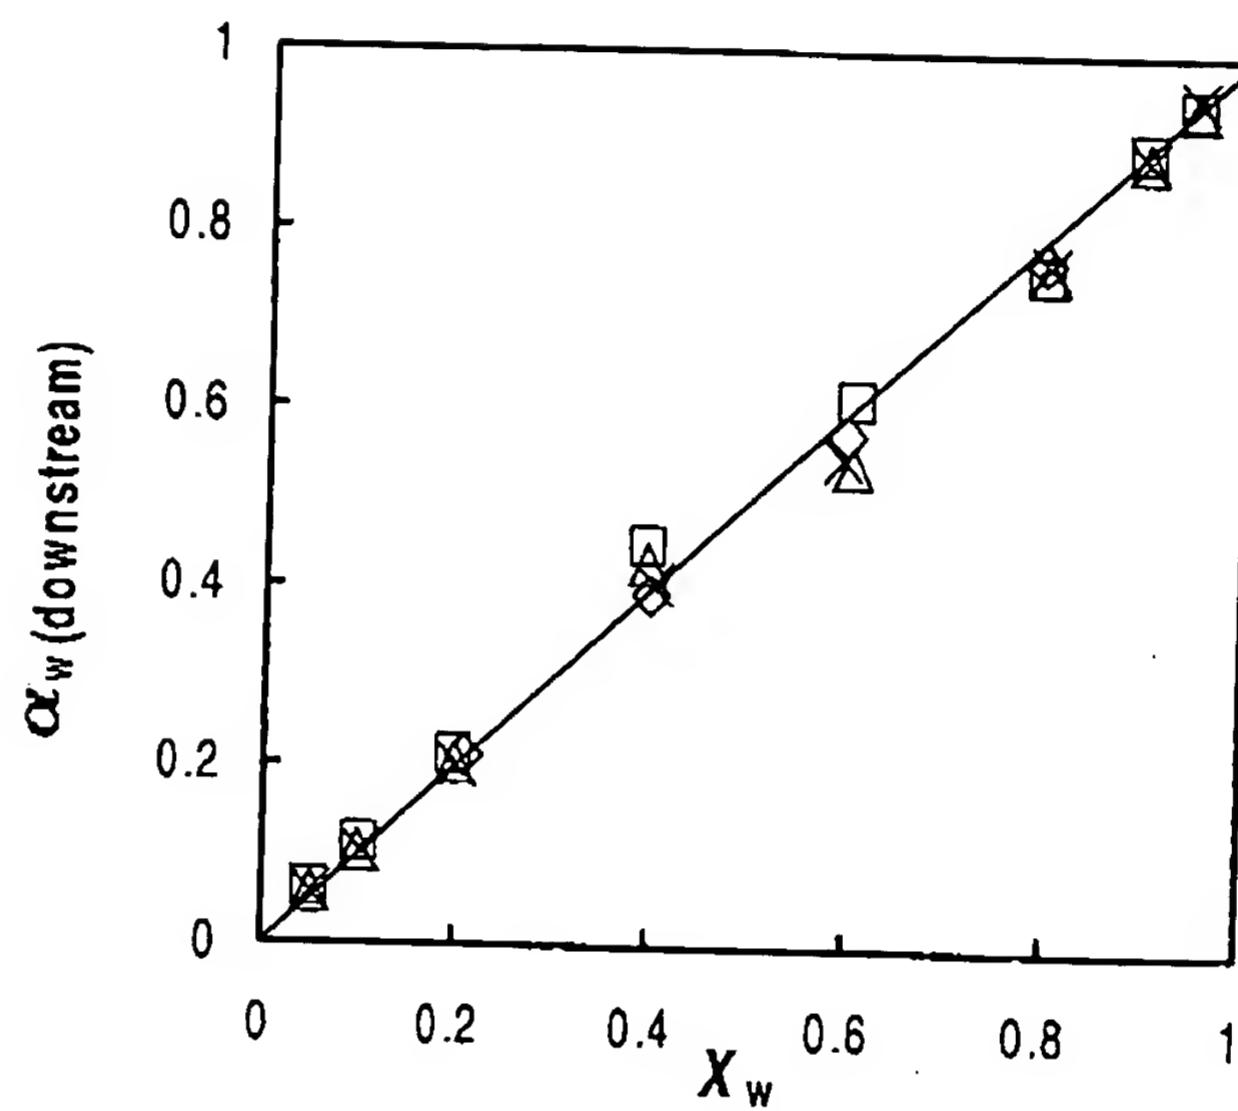
Fig. 6
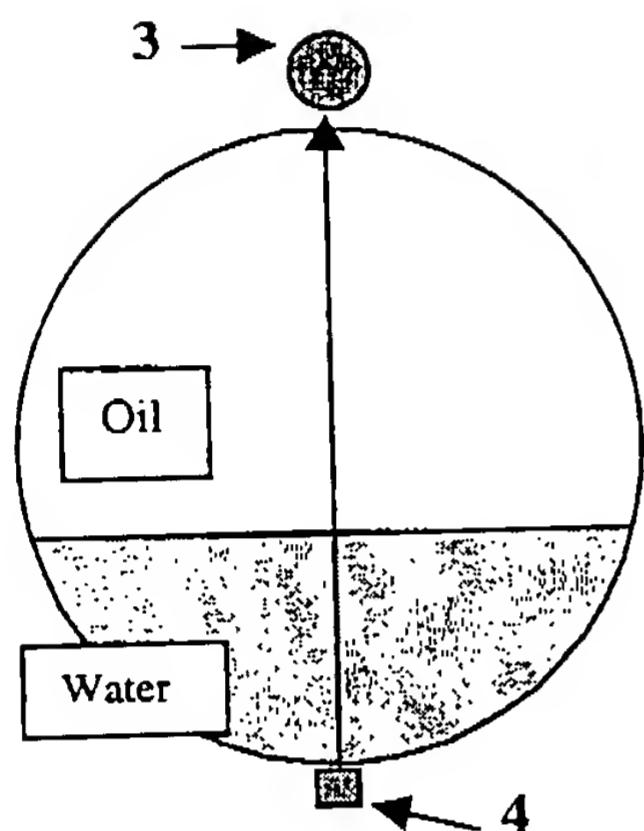
Fig 7a
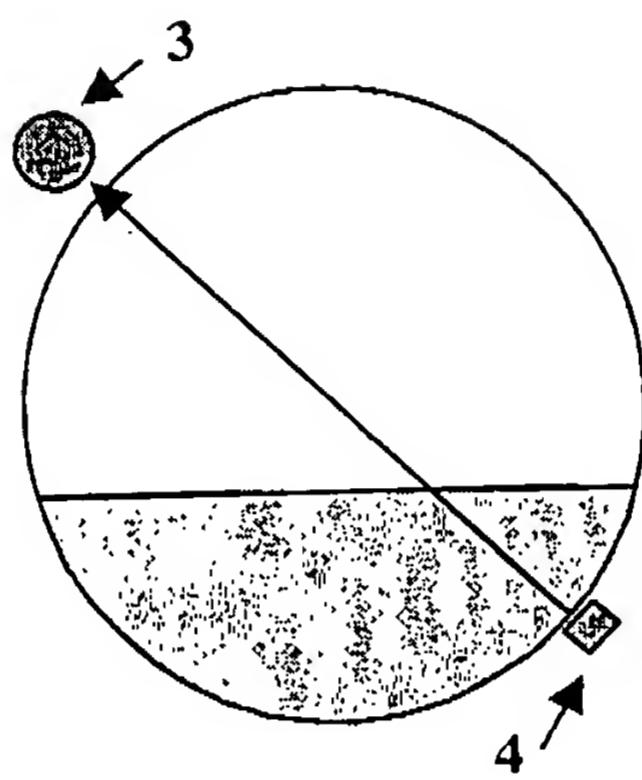
Fig 7b
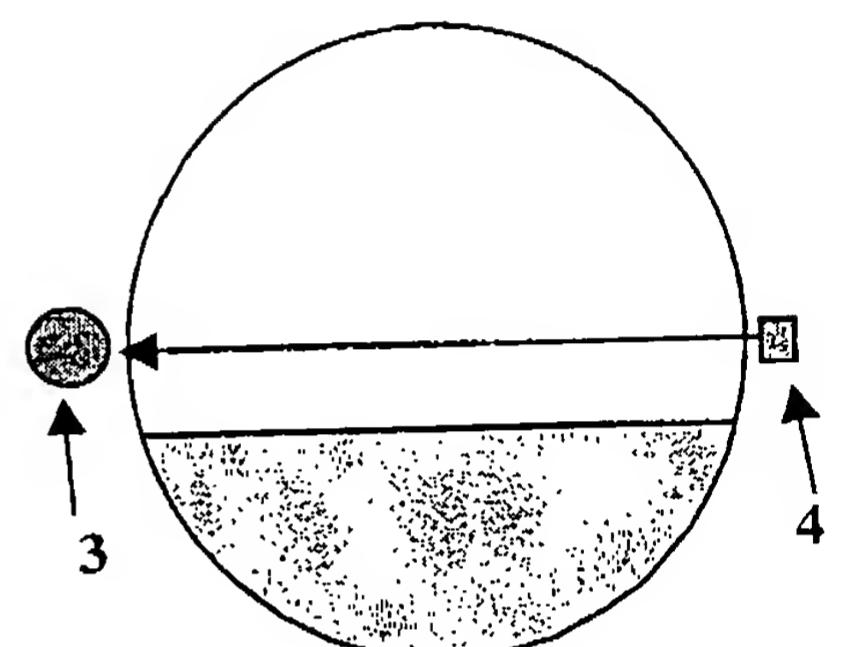
Fig 7c

α_w as a function of X_w for γ-ray measurement
18" downstream of venturi exit
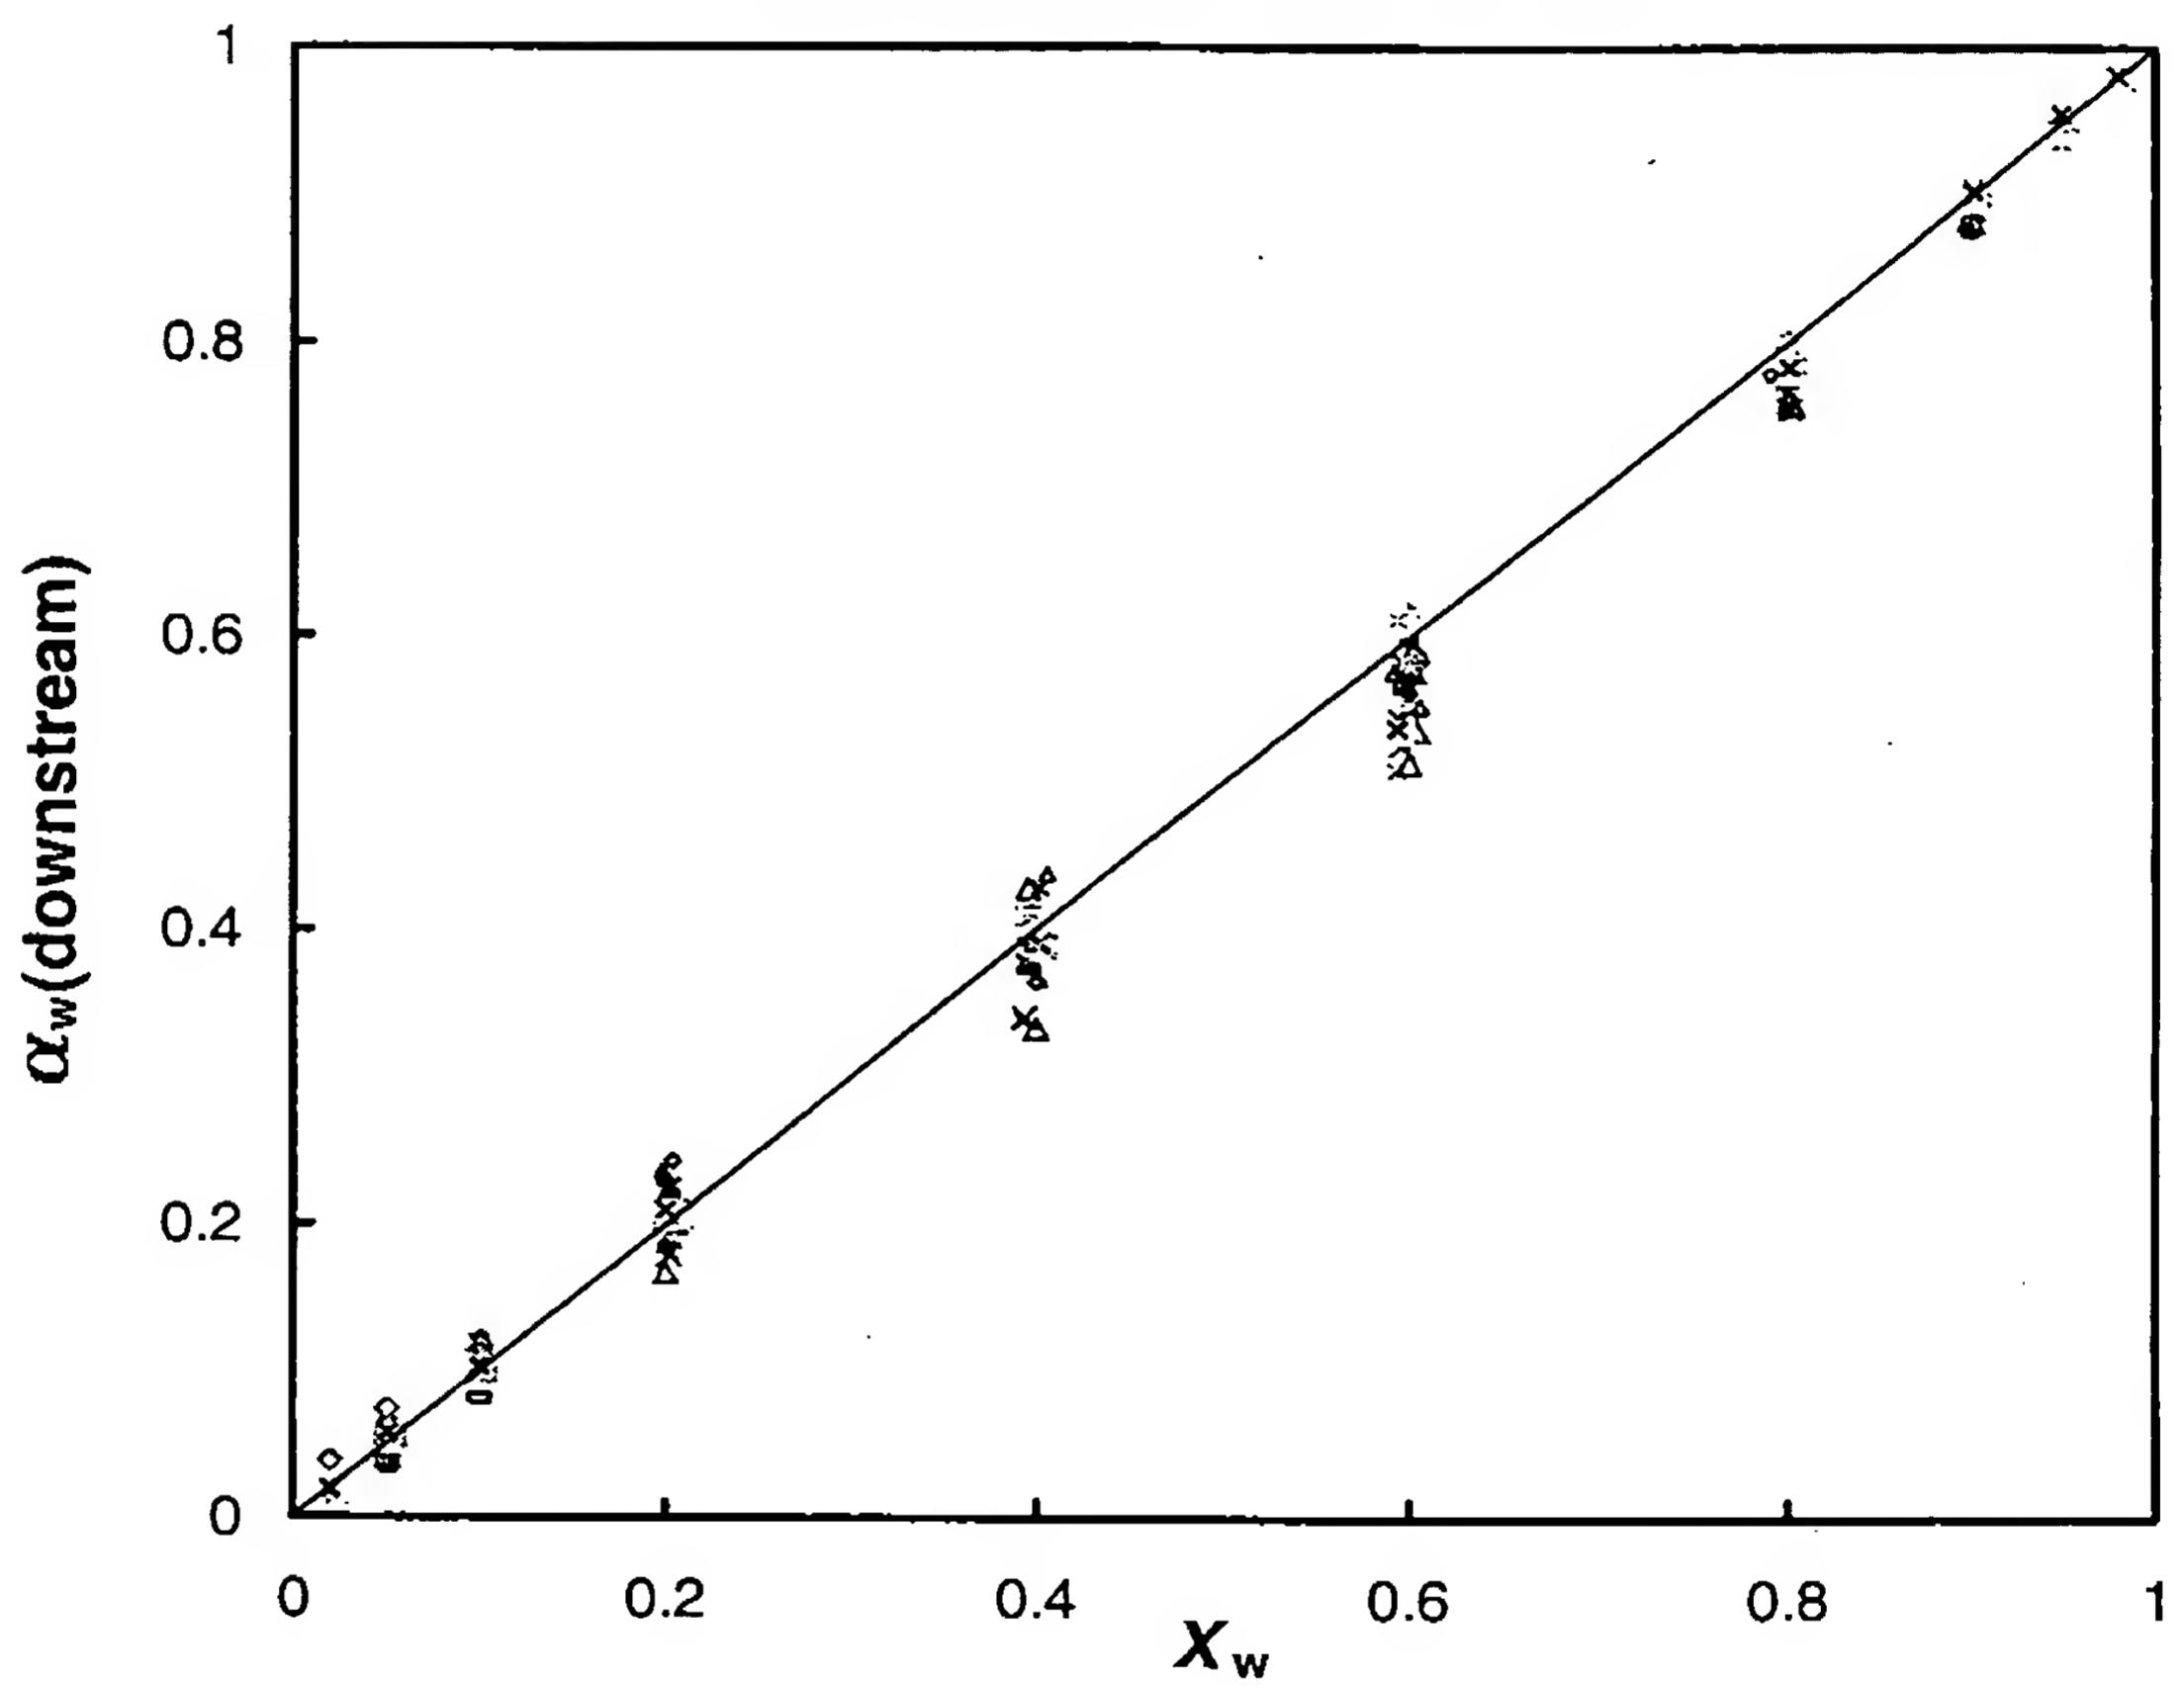
Fig. 8
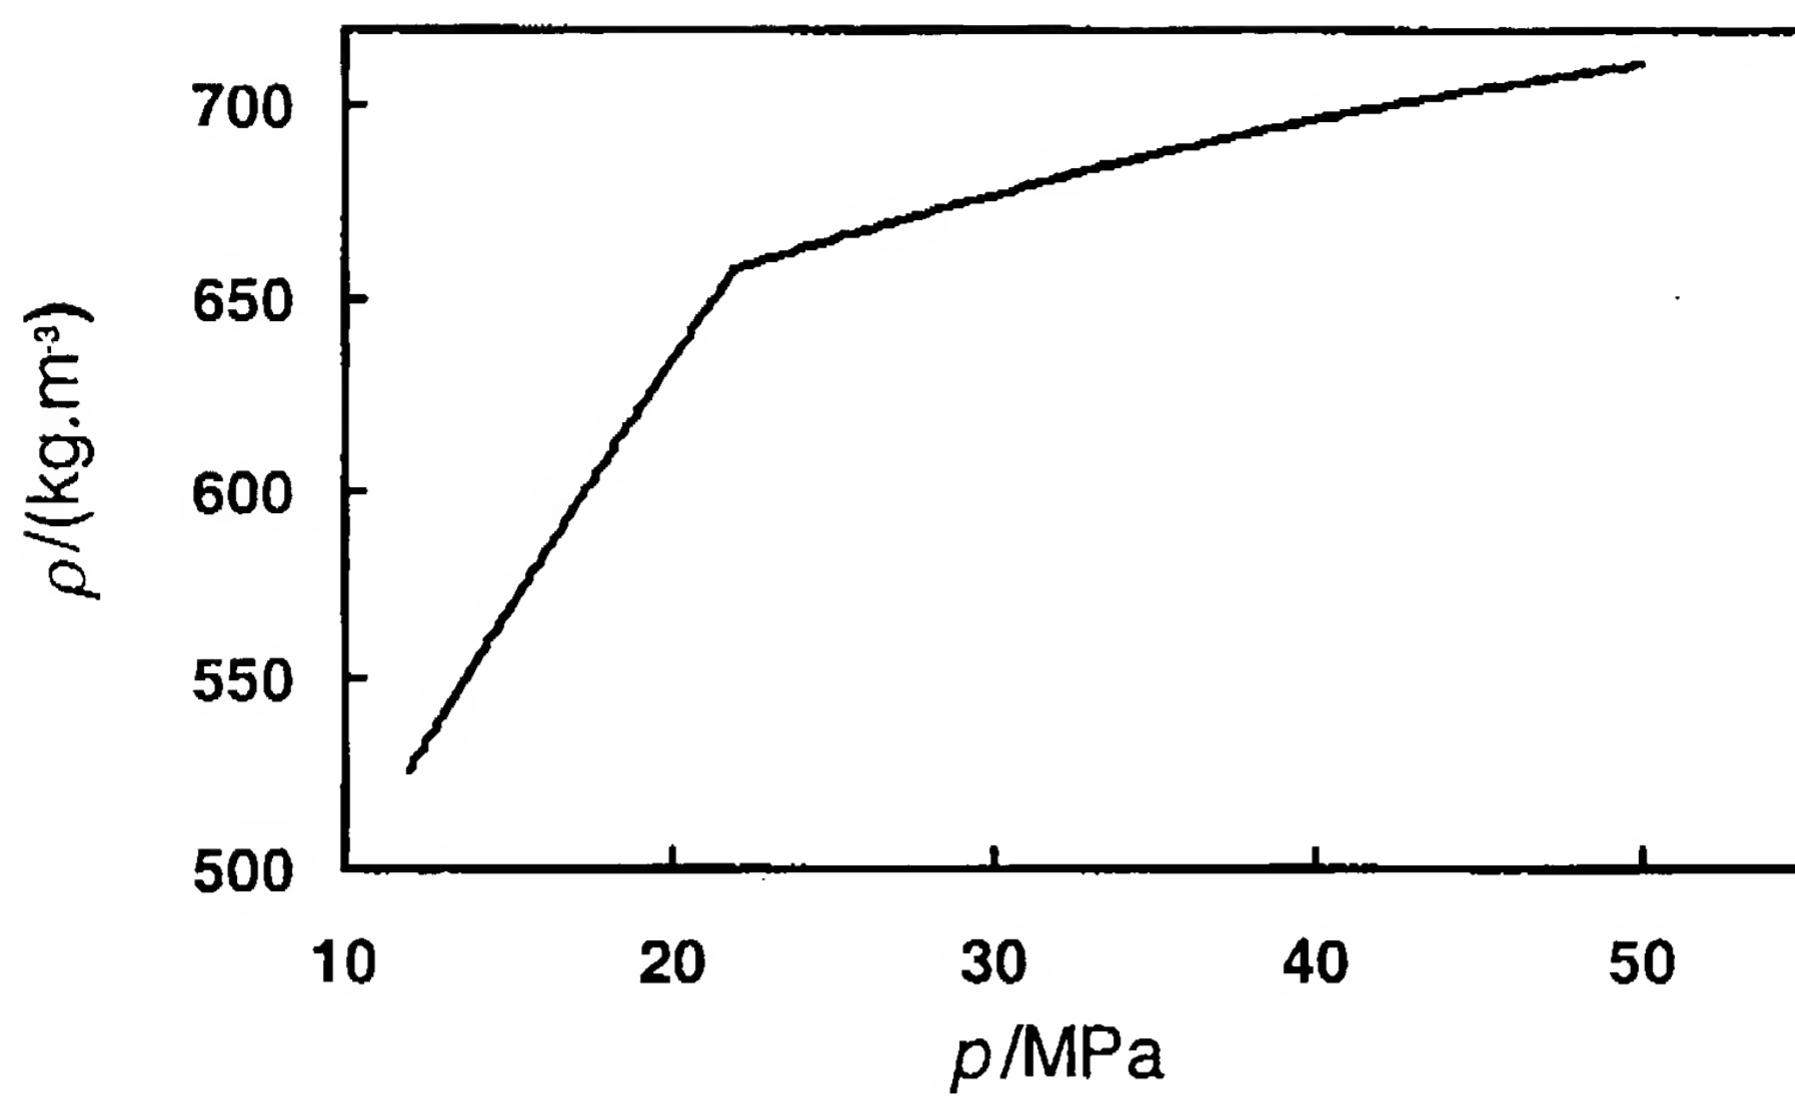
Fig. 9

FLOW METER FOR MULTI-PHASE MIXTURES

FIELD OF THE INVENTION:

5   The present invention relates to the field of
flow meters for multiphase mixtures. In particular,
the invention relates to flow meters for oil and water
mixtures in hydrocarbon boreholes.

BACKGROUND OF THE INVENTION:

10   The measurement of oil and water flow rate in
each producing zone of an oil well is important to the
monitoring and control of fluid movement in the well
and reservoir. In addition to a flow meter, each zone
may have a valve to control the fluid inlet from that

15   zone. By monitoring flow rates of oil and water from
each zone and reducing flow from those zones producing
the highest water cut (i.e., ratio of water flow rate
to total flow rate), the water production of the entire
well can be controlled. This, in addition, allows the

20   reservoir oil to be swept more completely during the
life of the well.

    Ideally, a flow meter in such an installation
should satisfy several criteria: 1) it should be
extremely reliable and operate for years at downhole

25   temperature and pressure; 2) it should operate in both
stratified (near-horizontal) and dispersed flow regimes
over a wide range of total flow rate and cut; 3) it
should not require that the completion be oriented
azimuthally in any particular way during installation;

30   4) it should not require licensing of radioactive
sources and, finally; 5) the flow meter should allow

small changes in water cut and flow rate to be detected.

Typically, downhole flow meters determine the holdup (volume fraction of oil or water) and the velocity of the oil phase, the water phase, or both. The flow rate of water is then determined from the product of water holdup α_w, the pipe area A, and the velocity of water U_w. An analogous relation holds for oil flow rate. In general, the velocities of water and oil are different. The slip velocity (difference in oil and water velocities) depends on many parameters, such as the inclination angle of the flow pipe (i.e. deviation), roughness of the pipe wall, and flow rates of the two phases. In general, one must measure the holdup and velocities of both oil and water to determine oil and water flow rate uniquely. In practice, sometimes one measures the velocity of only one phase and uses a theoretical or empirically determined slip law to obtain the other. This has a number drawbacks including inaccuracies due to differences conditions used as inputs to the model and the actual conditions downhole.

A common method to determine the velocity of a fluid is to measure the rotation rate of a turbine blade in the flow stream. In single phase flow, the rotational velocity of the turbine is simply related to the velocity of the flow. However, in mixed oil and water flow the response of the turbine can be so complicated as to be uninterpretable.

Another method of velocity measurement uses tracers. A tracer is injected into the phase of choice (oil or water) and, at a known distance downstream, a sensor detects the time of passage of the tracer. The velocity is computed from the known distance and time of travel. One disadvantage of the tracer method for permanent downhole use is the need for a reservoir of tracer material and a mechanical tracer injector. The reservoir limits the number of measurements and the injector, being a mechanical device, is prone to sticking and failure.

Another method of velocity measurement uses local capacitance or resistance sensors. This method is appropriate for flow regimes in which one phase is dispersed as droplets in another continuous phase. As a droplet passes one of the sensors, a signal is produced for a time duration related to the speed of the droplet. Given knowledge of the droplet size by other means, the velocity of the droplet can be deduced. One disadvantage of this method is that it does not work at all in a stratified flow regime, since it relies on the existence of bubbles.

There are other methods of flow measurement that can be used, which are not described herein, but are familiar to those skilled in the art.

Another method of velocity measurement uses a Venturi. In single phase flow, a Venturi generally

3

obeys the Bernoulli equation which relates volumetric flow rate Q to fluid density ρ and pressure drop from the inlet to the throat of the Venturi:

5
$$Q = C \sqrt{\frac{2\Delta p / \rho}{\left(\frac{1}{A_{throat}^2} - \frac{1}{A_{inlet}^2}\right)}}$$
Equation 1

where C is the discharge coefficient which is approximately unity but depends on the geometry of the Venturi, Δp is the pressure drop from Venturi inlet to
10 throat, and A_{throat} and A_{inlet} are the throat and inlet cross sectional areas, respectively. The same equation can be used to determine the combined oil and water flow rate where the density in this case is the average mixture density in the throat of the Venturi. In
15 practice, the square root in the equation makes it relatively insensitive to errors in both the density and pressure determinations.

A common method to determine the holdup in a
20 flow of oil and water is to measure the average density of the fluid. Since oil at downhole pressure and temperature typically has a density which is smaller than that of water (around 0.7 g/cm^3 compared to 1.0 g/cm^3), the oil and water holdups α_o and α_w can be
25 determined proportionately from the mixture density by the relations

$$\alpha_o = \frac{\rho_w - \rho_{mix}}{\rho_w - \rho_o}$$
Equation 2

4

$$\alpha_w = \frac{\rho_{mix} - \rho_o}{\rho_w - \rho_o} \quad \text{Equation 3}$$

A common method to determine the mixture
5   density is to measure the hydrostatic pressure of a
column of fluid with a gradiomanometer. This device
relies on having a component of the gravitational force
vector along the axis of the flow pipe. This type of
device, however, fails when the flow pipe is horizontal
10   because the gravitational force vector is perpendicular
to the pipe axis.

Another method to determine holdup uses
capacitor plates to measure the bulk dielectric
15   constant of the fluid. This method is used for flow
regimes in which the water is dispersed in bubbles
within an oil-continuous medium. It fails in stratified
flow or in flow regimes in which the oil is dispersed
in bubbles within a water-continuous medium.

20

Another method to determine holdup uses
electrodes or an inductive coupling to measure the bulk
resistance of the fluid. This method is used for flow
regimes in which the oil is dispersed in bubbles within
25   a water-continuous medium. It fails to work properly in
stratified flow or in flow regimes in which the water
is dispersed in bubbles within an oil-continuous
medium.

30   Another method to determine holdup uses
arrays of capacitor plates or resistance electrodes to

measure dielectric constant or resistance in the fluid
immediately surrounding the sensor. The accuracy of
this method depends on the number of sensors in the
array. The disadvantages with this method are that

5   small probes are prone to damage and fouling and the
probes are invasive to the pipe, preventing other tools
or devices from passing by them freely.

Mixers of various types have been used to mix

10   the oil and water, so as to effectively reduce the slip
and allow for more accurate determination of the flow
rates. Some mixers are simply small orifices in plates
of suitable material. Others comprise more elaborate
fins having certain twists or curled shapes. There are

15   a number of disadvantages, however, in using
conventional mixers when trying to measure the flow
rates of oil and water downhole. For example, the
mixer often obstructs the borehole, such that it may be
difficult to pass certain equipment such as production

20   logging tools, etc. Mixers also can produce
unacceptable amounts of pressure loss. Additionally,
mixers are prone to excessive wear with age.

It is possible to measure the pressure

25   differential upstream and downstream of a conventional
mixer in an attempt to determine the total flow rate of
oil and water. This technique, however, has a number
of drawbacks. For example, the accuracy of the flow
rate determined by this method is likely to be much

30   lower than using a Venturi, and, in general, greatly
dependent upon the flow rates. Using a mixer to

6

measure pressure differential can also lead to inaccuracy due to sensitivity to the exact location of pressure measurement. Using a conventional mixer in this fashion would also be prone to problems associated

5   with wear. For example, in an orifice mixer, the relationship between the pressure differential and the velocity could change significantly over time due to slight changes in shape and size of the orifice caused by wear.

10

U.S. Pat. No. 4,856,344, issued to Hunt, discloses using a Venturi for obtaining a pressure differential and using a gradiomanometer upstream and through the Venturi to measure density. Hunt discloses

15   using an iterative process to estimate the relative flow velocities. Hunt also discloses using a separate upstream step discontinuity to mix the fluids upstream of the gradiomanometer. However, the method disclosed in Hunt is prone to problems associated with relying on

20   estimates of the flow velocities (i.e. a slip model), using separate additional mixers upstream, and using a gradiomanometer (e.g. nonfunctional when pipe is horizontal, and low accuracy when near-horizontal).

25   U.S. Pat. No. 5,361,632, issued to Magnani, discusses a holdup measurement using a combination of gradiomanometer and gamma-ray densitometer. Thus, the method of Magnani is prone to problems associated with using a gradiomanometer which is not suitable for

30   measurements in near-horizontal pipes. Furthermore,

the method obstructs the borehole and would not be suitable for permanent installation.

U.S. Pat. No. 5,661,237, issued to Dussan et al. discusses a holdup measurement using local probes. There is no mention of a Venturi, however. The method obstructs the borehole and would not be suitable for permanent installation.

U.S. Pat. Nos 5,893,642 and 5,822,390, issued to Hewitt et al. disclose a method of using a mixer to measure flow rates. However, this method suffers from the disadvantages of using a mixer as described above. For example, the mixer obstructs borehole and is not suitable for permanent installation due to problems of wear.

SUMMARY OF THE INVENTION:

Thus, it is an object of the present invention to provide a flow meter suitable for downhole placement that is extremely reliable and capable of operating for years at downhole temperatures and pressures. It is another object of the invention to provide a flow meter that is capable of operating in both stratified (near-horizontal) and dispersed flow regimes over a wide range of total flow rate and cut. It is another object of the invention to provide a flow meter that does not require that the wellbore be oriented azimuthally in any particular way during installation. It is another object of the invention to

provide a flow meter that does not require the use of relatively strong radioactive sources. It is another object of the present invention to provide a flow meter that is capable of detecting small changes in water cut

5   and flow rate. It is another object of the invention to alleviate the problems associated with the use of conventional mixers, including the possible problems associated with measuring the pressure differential upstream and downstream of a conventional mixer. It is

10   another objective of this invention to provide a measurement of a phase transition pressure.

In this invention, we combine a Venturi total volumetric flow rate measurement with a holdup measurement approximately 3 - 10 pipe diameters

15   downstream of the Venturi. The invention makes use of a flow instability downstream of the Venturi throat. When the oil and water flow accelerates into the throat of the Venturi, the streamlines converge from their upstream value and the pressure drops as the

20   hydrostatic head is converted into kinetic energy. Conversely, as the flow enters the diffuser section the pressure recovers as the flow decelerates. This adverse pressure gradient can lead to separation of the flow within the boundary layer at some position downstream

25   of the throat of the Venturi. That position depends on the geometry of the Venturi, the individual oil and water flow rates, the deviation angle of the pipe to the horizontal, and the densities of the two fluids. The main flow expands beyond the Venturi as a jet of

30   approximately uniform velocity bounded by a free shear layer, and such shear layers are prone to Kelvin-

9

Helmholtz type instabilities that grow and are convected downstream. In the diffuser of the Venturi, an instability such as this grows and perturbs the interface between the two fluids. The amplitude of the

5 instability depends on the geometry of the Venturi, the deviation of the pipe, the densities of the fluids, and the flow rates. An instability of sufficient strength causes the interface to roll up and break with a resulting mixing of the two layers completely across

10 the pipe.

According to the invention, a method of determining the flow rate of a first fluid phase in a pipe containing at least two fluid phases is provided. The fluid phases flow through an upstream pipe, a

15 constriction, which is preferably a Venturi, and a downstream pipe. The differential pressure of the fluid phases is measured such that it can be related to the total flow rate of the fluid phases through the section of pipe. The differential pressure is

20 preferably measured between the upstream pipe and the throat of the Venturi. The volume fraction of the first fluid phase (preferably water) is determined by making a measurement at a location downstream of the constriction where the flow of the at least two fluid

25 phases is not stratified, which results from the fluid passing through the Venturi. The flow rate of the first fluid (preferably water) is determined by assuming its velocity is substantially the same as that of the other fluid phases.

30

BRIEF DESCRIPTION OF THE DRAWINGS:

10

Figure 1 is a perspective view of a section of pipe including a Venturi used to measure velocity and to mix oil and water according to a preferred embodiment of the invention;

Figure 2 is a detailed cross sectional view of a Venturi used to measure velocity and to mix oil and water according to a preferred embodiment of the invention;

Figure 3 is a perspective view of a section of pipe including a Venturi and other equipment used to measure velocity and to mix oil and water according to a preferred embodiment of the invention;

Figure 4 is a graph illustrating the relationship between water holdup compared to the water cut as experimentally measured at a Venturi throat section;

Figure 5 is a graph illustrating the relationship between water holdup compared to the water cut as experimentally measured at a location upstream from a Venturi;

Figure 6 is a graph illustrating the relationship between water holdup compared to the water cut as experimentally measured at a location downstream from a Venturi, according to a preferred embodiment of the invention;

11

Figs. 7a-c illustrate the effects of different orientations of the attenuation path where the flows of oil and water are not sufficiently mixed; and

5

Figure 8 is a graph comparing water holdup measured downstream and water cut, for various flow rates, cuts, inclinations and attenuation path orientations.

10

Figure 9 is a graph showing the density determined with the preferred embodiment as a function of pressure.

15

DETAILED DESCRIPTION OF THE INVENTION:

Figure 1 is a perspective view of a section of pipe 100 including a Venturi 110 used to measure

20 velocity and to mix oil and water according to a preferred embodiment of the invention. The direction of flow is shown by arrow 102. Pipe section 112 is upstream of the Venturi 110. Venturi 110 comprises a tapered inlet section 114, a Venturi throat 116, and a

25 Venturi diffuser 118. Pipe section 120 is downstream of the Venturi 110, and has diameter 124. According to the invention, it has been found that significant mixing of oil and water takes place downstream of Venturi 110 and therefore it is a good place to make a

30 holdup measurement. In Figure 1, downstream location

12

122 is shown to be a suitable location for measuring the holdup.

Figure 2 is a detailed cross sectional view of a Venturi used to measure velocity and to mix oil and water according to a preferred embodiment of the invention. The direction of flow is shown by arrow 102. Inlet 114 is smoothly tapered from the diameter of the upstream section 112 to the diameter of the Venturi throat 116. As shown in Figure 2, the Venturi throat 116 has a diameter narrower than upstream section 112. The walls of the Venturi throat 116 are preferably approximately parallel along the direction of flow 102. The Venturi diffuser 118 is gradually tapered from the diameter of the Venturi throat 116 to approximately the diameter 124 of the downstream section 120. Upstream section 112, inlet 114, throat 116, diffuser 118, and downstream section 120 all have approximately circular cross-sections, and the diameter of the throat 116 is preferably about half that of the upstream pipe section (i.e. beta = 0.5). For, example if the upstream pipe section diameter is 15 cm, then the throat is preferably about 7.5 cm. Preferably, Venturi 110 is designed to meet the ISO standard and is designed so as to allow for relatively accurate measurements of differential pressure, while impeding the flow as little as possible. However, it is contemplated that other Venturi dimensions and geometries could also facilitate an accurate differential pressure measurement and provide sufficient mixing for an accurate holdup measurement,

according to the invention. The location with respect
to the Venturi where the holdup measurements were taken
is shown at downstream location 120. As will be
described in greater detail below, measuring the holdup

5   at locations downstream as shown advantageously allows
for much more accurate determinations of flow rates.
As shown in Figure 2, a port 134 is provided to measure
the pressure at a location within Venturi throat 116.
Another port, not shown in Figure 2, is provided

10 upstream which in combination with port 134 allows for
measurement of pressure differential.

Figure 3 is a perspective view of a section
of pipe including a Venturi and other equipment used to
15 measure velocity and to mix oil and water according to
a preferred embodiment of the invention.

In a preferred embodiment shown in Figure 3,
the invention combines a Venturi 110 with a simple
20 gamma-ray attenuation density measurement. A
differential pressure sensor 130 measures the pressure
drop between the inlet 112 (at port 132) and the
Venturi throat 116 (at port 134). (Note that although
the pressure sensor 130 is shown to measure the
25 differential pressure between the locations of ports
132 and 134, other locations could be chosen. For
example, although unconventional, one of the
measurements could be taken downstream of the Venturi.)
A flow instability develops as the flow exits from the
30 Venturi diffuser 118. A source of gamma-rays 142 is

provided which is preferably ^{133}Ba, (although ^{137}Cs or other isotopes can also be used). Preferably, source of gamma-rays 142 is sufficiently weak as to be exempt from licensing. A gamma-ray detector 144, preferably a

5   NaI(Tl) scintillation detector, is placed diametrically opposite source 142. The gamma-ray source 142 and detector 144 are preferably placed at a particular location which is a distance 3-10 times the downstream pipe diameter 124. With no fluid in the pipe, gamma-

10   rays from the source travel across the pipe and are detected in the gamma-ray detector with a certain rate R_s. With fluid in the pipe, the gamma-rays are scattered and absorbed according to the density of the fluid, with the result that the detection rate R is reduced

15   according to

$$R = R_s e^{-\tau\rho d} \qquad \text{Equation 6}$$

where d is the diameter of the pipe, ρ is the

20   average density of fluid along the path between source and detector, and τ is the mass attenuation coefficient, which is essentially constant for typical borehole fluids. One may calibrate the device with a known fluid, for instance water, giving

25

$$R_w = R_s e^{-\tau\rho_w d} \qquad \text{Equation 7}$$

Then one may determine the average oil holdup α_o (or water holdup using the relation $\alpha_w = 1 - \alpha_o$) of a

30   mixture of oil and water along the attenuation path of the gamma-rays (across the diameter of the pipe) from

15

the mixture density ρ_{mix} and Equations 2 and 7 according to

$$\rho_{mix} = \frac{\ln(R_s) - \ln(R_{mix})}{d\tau} \qquad \text{Equation 8}$$

$$\alpha_o = \frac{\ln(R_{mix}) - \ln(R_w)}{d\tau(\rho_w - \rho_o)} \qquad \text{Equation 9}$$

This holdup, which is the average along the attenuation path, is equal to the pipe area averaged holdup because the oil and water are mixed relatively thoroughly throughout the pipe cross-section. It has been found on the basis of flow loop experiments that this condition is satisfied approximately 3-10 pipe diameters downstream of the downstream end of the Venturi diffuser even if the flow entering the Venturi is stratified. However, a substantial improvement in the accuracy of determining the relative flow rates of water and oil can be obtained under some circumstances by measuring the holdup at any location from just downstream of the Venturi to about 20 pipe diameters. For example, it may be sufficiently accurate to measure the holdup at locations where the stratification has been significantly perturbed.

It is possible to determine density from direct PVT measurements on the fluid, or by determining either the decay time or resonance frequency of a vibrating body, or from an equation of state with the appropriate input data (usually the chemical composition and pressure-volume-temperature

16

measurements of the fluid). An equation of state is a function that provides thermodynamically consistent data on the configurational properties of liquids and gases. The term equation of state is used to describe

5   an empirically-derived function which provides a relation between pressure, density, temperature, and for mixtures composition. The samples used for these analyses can be obtained from separator, surface or bottom hole sampling. The latter provides a sample at

10 the location of the flowmeter and as such is the preferred method. A Wireline tool, such as either the MDT or RFT can be used to obtain these samples. When three phases are present, detailed pressure-volume-temperature-composition measurements of the fluid are

15 preferably performed to provide density and phase volumes. The presently preferred method is to obtain the densities with an equation of state from compositional data. In the case where oil, gas and water are present, the volume or mole fraction of the

20 gas and oil are also preferably obtained from the equation of state to facilitate the determination of water holdup.

It is presently believed that measuring the

25 holdup in a region approximately 3-5 diameters from the Venturi can provide even greater accuracy over a wider range of flow rates. Finally, under the tested conditions, it is believed that measuring the holdup at approximately 5 diameters from end of the diffuser will

30 provide the greatest accuracy in relative flow rate measurement.

In general, the distance from the Venturi at which a suitable amount of mixing occurs will depend on many factors. First the amount of mixing needed to

5   substantially improve flow rate determination depends on the method of holdup measurement. For example, if more than one gamma-ray beam is used, at different angles, a lower amount of mixing may be acceptable to accurately determine the holdup and water cut. Second,

10 the distance from the Venturi at which suitable mixing occurs depends on the particular geometry and anticipated flow rates of the fluids in the Venturi. Furthermore, the density and viscosity of the fluids, and the deviation can influence the amount and location

15 of mixing caused by the Venturi.

In addition, continual monitoring of the average density of fluid provides a means of determining phase boundaries. Indeed, the gamma-

20 radiation attenuation, which determines the density of the objects in the radiation path is proportional to the volume fraction of each phase multiplied by the density of each phase. This is the preferred method for phase boundary detection as shown in Figure 9 for a

25 bubble point. Figure 9 is a graph showing the density determined with the preferred embodiment as a function of pressure. Clearly, the bubble pressure is easily detected as a discontinuity in $(\partial \rho / \partial p)_T$ indicates the bubble. Other methods, such as PVT experiments,

18

familiar to those skilled in the art could also be used.

The total flow rate is computed from Equation
5 1, using the mixture density computed from Equation 8.
Holdup is computed from Equation 9 and the oil and
water flow rates are computed from Equations 4 and 5.

Figure 4 is a graph illustrating the
10 relationship between water holdup compared to the water
cut as experimentally measured at a Venturi throat when
flowing various mixtures of oil and water. The vertical
axis is the water holdup, or the volume fraction of
water. The horizontal axis is water cut, or the ratio
15 of water flow rate to the total volumetric flow rate.
The measurements were taken at different total
volumetric flow rates ranging from 40 cubic meters per
hour to 100 cubic meters per hour. As can be seen in
Figure 4, the water holdup varies significantly from
20 the water cut at all measured flow rates.

Similarly, Figure 5 is a graph illustrating
the relationship between water holdup compared to the
water cut, but the holdup measurements were made at a
25 location upstream from a Venturi. As in Figure 4, the
holdup measurements do not accurately reflect the water
cut values for most of the flow rates measured.

Figure 6 is a graph illustrating the
30 relationship between water holdup compared to the water
cut as experimentally measured at a location downstream

19

from a Venturi, according to a preferred embodiment of the invention. Specifically, in Figure 6, the water holdup was measured at a location approximately 3 pipe diameters downstream from the downstream end of the

5   Venturi diffuser. As can be seen in Figure 6, in stark contrast from the data in Figures 4 and 5, the measured holdup accurately reflects the water cut at all the measured flow rates.

10   Thus, we have experimentally found that a significant instability exists downstream of the Venturi regardless of the flow regime at the inlet of the Venturi as long as the total flow rate exceeds a minimum value. For example, for a 15 cm diameter

15   upstream section of pipe with a Venturi throat diameter of about 7.5 cm (i.e. beta=0.5), approximately 20 cubic meters per hour. Because of this instability and the mixing that it produces, oil and water are well-mixed approximately 3 -10 pipe diameters downstream of the

20   Venturi exit, although as mentioned above, other measuring the holdup at other locations may be suitable in certain situations.

            Due to the well-mixed condition, the oil and

25   water are nearly homogeneously distributed throughout the pipe and the slip velocity between oil and water is very small. In such a condition, the water holdup is equal to the water cut X_w, or ratio of the water volumetric flow rate to the total flow rate.

30   Conversely, the oil holdup is equal to the oil cut, or

ratio of the oil volumetric flow rate to the total flow
rate. This is important because the oil and water flow
rates can then be obtained directly from the product of
the respective holdup and total flow rate from the

5   Venturi:

$$Q_o = X_o Q = \alpha_o Q \qquad \text{Equation 4}$$

$$Q_w = X_w Q = \alpha_w Q \qquad \text{Equation 5}$$

10

Advantageously, no slip model is required.
Even if the water holdup is not exactly the same as the
water cut, differences of a few percent can be

15   incorporated as empirical corrections to the equations
given above.

According to the invention, many of methods
of holdup measurement, including most of those

20   mentioned above, could be used to measure holdup at a
location downstream from the Venturi, so long as the
downstream measurement is taken at a location that
experiences a suitable amount of mixing. For example,
it is possible to determine holdup by measuring the

25   sound speed of the fluid, or by determining either the
decay time or resonance frequency of a vibrating body.
(Note that using a conventional gradiomanometer may not
be suitable, since that method ordinarily relies on
pressure differentials taken over lengths that are

30   substantially greater than length of mixed oil and
water provided by the Venturi.) However, the preferred
embodiment in this invention is to determine the fluid

density by measuring the attenuation of gamma-rays across a diameter of the pipe. The determination of density from gamma-ray attenuation is well known in the art. Conventionally, because of temporal

5   inhomogeneities in the flow, large radioactive sources are usually used to measure density in a short period of time. However, because in the present invention the flow is relatively homogeneous in time and space, the density measurement may be taken over several seconds

10   or minutes, allowing the use of very weak sources that are exempt from licensing. Additionally, this very simple measurement can use detectors that are similar to those already in use in conventional Wireline gamma-ray logging tools.

15
        In a well-mixed flow, the average fluid density determined across a diameter of the pipe, such as given by gamma-ray attenuation, is equivalent to the average fluid density over the entire pipe. Also, there

20   is little slip and the water holdup is essentially equal to the water cut.

        It is important to note that such conditions do not exist at other locations in the pipe, such as

25   upstream of the Venturi or in the Venturi throat. At each of the locations upstream, downstream and in the Venturi throat, the gamma-ray attenuation has been measured along a vertical path and the density and holdup extracted from it for several different total

30   flow rates. The water holdup at the Venturi throat is compared to the water cut in Fig. 4. Clearly, the

22

holdup is not equal to the cut, indicating that the mixture is not homogeneous. In Fig. 5, the water holdup upstream is compared to the water cut. Again, the holdup is not equal to the cut. Finally, in Fig. 6, the

5   water holdup downstream at a spacing of 3 pipe diameters from the Venturi exit is plotted against water cut. In this case the holdup is very nearly equal to the cut.

10   Also, it is important to note for holdup measurements made upstream and at the Venturi throat, the orientation of the attenuation path is important because the flow is not homogeneous. For example, upstream and in near-horizontal orientation of the

15   pipe, the flow will often be stratified. Figs. 7a-c illustrate the effects of different orientations of the attenuation path where the flows of oil and water are not sufficiently mixed. Clearly, the average density along the three paths is different. For example, in

20   Figure 7c the attenuation path is located entirely in the oil. In this instance, there is no information at all about the average density or holdup.

        However, at downstream locations where a

25   substantial mixing occurs (for example, at a spacing 3-10 pipe diameters from the downstream end of the Venturi diffuser) the flow is homogeneous and the attenuation measurement provides the mixture density and holdup.

30   Some of the further advantages of measuring the holdup at such downstream locations are shown in

Figure 8. Figure 8 is a graph comparing water holdup measured downstream and water cut, for various flow rates, cuts and inclinations and attenuation path orientations. The holdup measurements were taken at a

5 distance approximately three pipe diameters downstream of the Venturi. The data were taken at flow rates varying from 60 to 120 cubic meters per hour, at inclinations (i.e. the vertical tilt of the flowpath) ranging from 70 to 90 degrees, and at three attenuation

10 path orientations as shown in Figs. 7a-c. As can be seen from the graph, the measured holdup very closely approximates the water cut over a wide range of values. Significantly, the holdup is nearly equal to the cut over the different orientations and inclination angles.

15

While preferred embodiments of the invention have been described, the descriptions are merely illustrative and are not intended to limit the present invention. For example, although the present invention

20 has thus far been principally described in connection with measuring fluid flow rates in mixtures of oil and water, the present invention is also applicable to facilitate the determination of fluid flow rates in other mixtures. In general, a Venturi could also be

25 used to determine velocity and as a mixer for mixtures of any fluids, including gas phases. For example, two liquids, one liquid and one gas, or two liquids and one gas. The geometry of the Venturi should be designed so as to facilitate a suitable amount of mixing at the

30 flow rates of interest, and the measurement of the holdup should be taken at a downstream location where a

sufficient amount of mixing takes place to enable an accurate determination of flow rate from the measured volume fraction.

In the case where a gas phase is present, the holdup can be determined from measurements of density with either equations (2) or (3), and an equation of state, or direct measurements, can be used to determine the oil and water densities. In the presence of three phases, oil, water and gas below the bubble pressure, the average hydrocarbon density can be determined with an equation of state based on a compositional analysis. For three phase fluid, oil, water, and gas, the volume (mole fraction) average density of the oil and gas are used in the analysis which is consistent in this domain with the density determined with the gamma-ray for the water, oil and gas. The preferred method makes use of an equation of state.

As mentioned, the present invention is applicable to mixtures of three or more phases, where a suitable Venturi can be used to both measure velocity and mix the various phases. So long as the velocity of the phases and the geometry of the Venturi is sufficient to mix the various phases, the amount of slip can be reduced to a relatively small level and accurate flow rates can be determined. When determining flow rates in mixtures of three or more phases, one or more additional measurements should be taken to determine the particular holdup of interest, since the single gamma-ray beam would only indicate an average density for all the phases. For example, two suitably chosen different gamma-ray energies could be

25

used to determine the fraction of each of three phases. However in the case where the two of the phases are oil and gas the following method can be advantageously used. The individual hydrocarbon phase densities are

5   determined (as can be the aqueous phase) with an equation of state as described above.

CLAIMS

We claim:

5   1. A method of determining the flow rate of a
first fluid phase in a section of pipe containing at
least two fluid phases, the method comprising the steps
of:

flowing the at least two fluid phases through
10   the section of pipe comprising an upstream pipe, a
constriction, and a downstream pipe;

determining a differential pressure of the
fluid phases between a first location and a second
location, the first and second locations
15   positioned such that the differential pressure
resulting from the fluid phases passing through
the constriction can be related to the total flow
rate of the fluid phases through the section of
pipe; and

20   determining the volume fraction of the first
fluid phase by at least in part by making a
measurement at a location downstream of the
constriction where the flow of the at least two
phases is not stratified.

25

2. The method of claim 1 wherein the
constriction is a Venturi comprising a throat, and the
first location is at the throat.

30   3. The method of claim 2 wherein the second
location is at the upstream pipe.

27

4. The method of claim 2 wherein the second location is at the downstream pipe.

5. The method of claim 2 wherein the throat of the Venturi comprises approximately parallel walls defining a diameter of the throat.

6. The method of claim 5 wherein the Venturi further comprises a diffuser immediately downstream of the throat, the diffuser comprising walls having a diameter approximately equal to the diameter of the throat at an upstream end, and the walls being tapered to a larger diameter towards a downstream end.

7. The method of claim 1 wherein the measurement used in determining the volume fraction of the first fluid phase is made at a location having a distance from the constriction of approximately 0-20 times the diameter of the downstream pipe.

8. The method of claim 7 wherein the measurement used in determining the volume fraction of the first fluid phase is made at a location having a distance from the constriction of approximately 3-10 times the diameter of the downstream pipe.

9. The method of claim 8 wherein the measurement used in determining the volume fraction of the first fluid phase is made at a location having a distance

from the constriction of approximately 3-5 times the
diameter of the downstream pipe.

10. The method of claim 9 wherein the measurement
used in determining the volume fraction of the first
fluid phase is made at a location having a distance
from the constriction of approximately 5 times the
diameter of the downstream pipe.

11. The method of claim 10 wherein the
measurement used in determining the volume fraction of
the first fluid phase is made at a location where the
velocities of the at least two phases is approximately
the same.

12. The method of claim 1 wherein the measurement
taken in determining the volume fraction of the first
fluid phase comprises a density measurement of the at
least two fluid phases.

13. The method of claim 12 wherein the density is
measured by determining the attenuation of least one
gamma-ray beam passing through the fluid phases.

14. The method of claim 13 wherein the at least
one gamma-ray beam is produced using a weak source.

15. The method of claim 14 wherein the weak
source of the gamma-ray beam comprises a ^{137}Cs source.

16.   The method of claim 14 wherein the weak source of the gamma-ray beam comprises a ^{133}Ba source.

17.   The method of claim 12 wherein the density
5   measurement is used to determine the transition pressure for at least one of fluid phases.

18.   The method of claim 17 wherein the fluid phase for which the transition pressure is determined
10   substantially comprises hydrocarbons.

19.   The method of claim 18 wherein the transition pressure is the bubble point of the hydrocarbon fluid phase.
15

20.   The method of claim 1 further comprising the step of determining the individual densities of the at least the two fluid phases.

20   21.   The method of claim 20 wherein the individual densities are determined using an equation of state.

22.   The method of claim 21 wherein compositional data is used in determining the individual densities.
25

23.   The method of claim 22 wherein the compositional data is derived from samples of the fluid phases.

24. The method of claim 20 wherein the phase densities are determined from samples of the fluid phases.

5   25. The method of claim 1 wherein the measurement taken in determining the volume fraction of the first fluid phase comprises a capacitance measurement of the at least two fluid phases.

10   26. The method of claim 1 wherein the measurement taken in determining the volume fraction of the first fluid phase comprises a resistivity measurement of the at least two fluid phases.

15   27. The method of claim 1 wherein the measurement taken in determining the volume fraction of the first fluid phase comprises a measurement of the fluid phases using a gradiomanometer.

20   28. The method of claim 1 wherein the measurement taken in determining the volume fraction of the first fluid phase comprises a measurement of the speed of sound in the at least two fluid phases.

25   29. The method of claim 1 wherein the measurement taken in determining the volume fraction of the first fluid phase comprises determining either the decay time or resonance frequency of a vibrating body in the at least two fluid phases.

30

30. The method of claim 1 further comprising the step of determining the flow rate of the first fluid phase using the volume fraction of the first fluid and the differential pressure, and assuming the velocities of the first fluid phase and another phase is substantially the same.

31. The method of claim 1 wherein the first fluid phase is water and the second fluid phase is oil.

32. The method of claim 1 wherein the constriction is suitable for permanent installation in a hydrocarbon borehole.

33. The method of claim 1 wherein the first fluid phase is a gas and the second fluid phase is a liquid.

34. The method of claim 33 wherein the first fluid phase is hydrocarbon gas and the second fluid phase is a hydrocarbon liquid.

35. The method of claim 34 further comprising the step of determining the individual densities of the at least the two fluid phases using an equation of state and compositional data.

36. The method of claim 1 wherein the step of flowing comprises flowing a third fluid phases through the section of pipe, the method further comprising the step of determining the volume fractions of a second and a third fluid phase by making a measurement at a

location downstream of the constriction where the flow of the three phases is not stratified.

37. The method of claim 36 wherein the first fluid phase is hydrocarbon gas and the second fluid phase is a hydrocarbon liquid.

38. The method of claim 37 further comprising the step of determining the individual densities of the first and second fluid phases using an equation of state and compositional data.

39. An apparatus for determining the flow rate of a first fluid phase in a pipe containing at least two fluid phases, the apparatus comprising:

an upstream pipe having a diameter;

a Venturi having a throat with a throat diameter, the Venturi disposed immediately downstream from and in fluid communication with the upstream pipe;

a downstream pipe having a diameter, disposed immediately downstream from and in fluid communication with the Venturi;

a throat pressure meter configured to determine a throat pressure of the fluid phases measured at the throat;

a second pressure meter configured to determine the pressure of the fluid phases measured at a second location, the second location positioned such that the change in pressure resulting from the fluid phases passing through

the Venturi can be related to the total flow rate of the fluid phases; and

a calculating apparatus adapted and configured to determine the volume fraction of the first fluid phase by making a measurement at a location downstream of the Venturi where the flow of the at least two phases is not stratified.

40. The apparatus of claim 39 wherein the second location is on the upstream pipe.

41. The apparatus of claim 40 wherein the Venturi further comprises a diffuser immediately downstream of the throat, the diffuser comprising walls having a diameter at an upstream end approximately equal to the diameter of the throat, and the walls of the diffuser being tapered to a larger diameter towards a downstream end of the diffuser.

42. The apparatus of claim 41 wherein the upstream pipe, the Venturi, and the downstream pipe are suitable for permanent installation in a hydrocarbon borehole.

43. The apparatus of claim 42 wherein the measurement used in determining the volume fraction of the first fluid phase is made at a location having a distance from the diffuser of approximately 0-20 times the diameter of the downstream pipe.

44. The apparatus of claim 43 wherein the measurement used in determining the volume fraction of the first fluid phase is made at a location having a distance from the diffuser of approximately 3-10 times the diameter of the downstream pipe.

45. The apparatus of claim 44 wherein the measurement used in determining the volume fraction of the first fluid phase is made at a location having a distance from the diffuser of approximately 3-5 times the diameter of the downstream pipe.

46. The apparatus of claim 45 wherein the measurement used in determining the volume fraction of the first fluid phase is made at a location having a distance from the diffuser of approximately 5 times the diameter of the downstream pipe.

47. The apparatus of claim 46 wherein the measurement taken in determining the volume fraction of the first fluid phase comprises a density measurement of the at least two fluid phases, which is measured by determining the attenuation of least one gamma-ray beam passing through the fluid phases.

48. The apparatus of claim 47 wherein the at least one gamma-ray beam is produced using a weak source.

49. The apparatus of claim 48 wherein the measurement used in determining the volume fraction of

the first fluid phase is made at a location where the velocities of the at least two phases is approximately the same.

5   50.   The apparatus of claim 49 wherein the upstream and downstream pipes and the Venturi are oriented approximately horizontally.